



**SMPARAMOUNT**<sup>TM</sup>  
WATER SOLUTIONS

UPGRADE WITH **SOFT WATER**  
ENJOY YOUR **LIFE STYLE**



Enjoy  
These  
Benefits

- **WATER SOFTENER**
- **SAND FILTER**
- **IRON FILTER**
- **CARBON FILTER**

Appliances and  
pipes last longer



Softer fabrics with  
brighter colors



smoother and  
**SOFTER**  
hair & skin



Prevents damage of  
bathroom fittings &  
appliances



UP TO  
**30%**  
YEARLY SAVINGS ON  
WATER HEATING

**BRING HOME THE TRUE MASTER PIECE**

**SMPARAMOUNT WATER SOLUTIONS**<sup>TM</sup>

📍 No. 126, Kamakotti Nagar 5th Street, Pallikaranai, Chennai- 600100

Opposite to Natesan Super Market

✉ : [smparamountwatersolutions@gmail.com](mailto:smparamountwatersolutions@gmail.com)

🌐 : [www.smparamount.in](http://www.smparamount.in)

☎ : 73388-88636

📞 : 9841313297



**SMPARAMOUNT**  
WATER SOLUTIONS

UPGRADE WITH **SOFT WATER**  
ENJOY YOUR **LIFE STYLE**



Enjoy  
These  
Benefits

- **WATER SOFTENER**
- **SAND FILTER**
- **IRON FILTER**
- **CARBON FILTER**



Appliances and  
pipes last longer



smoother and  
**SOFTER**  
hair & skin



Softer fabrics with  
brighter colors



UP TO  
**30%**  
YEARLY SAVINGS ON  
WATER HEATING



Prevents damage of  
bathroom fittings &  
appliances

**BRING HOME THE TRUE MASTER PIECE**

# Water Softener


Range available in FRP up to 60,000 Liters

Model	Soft -20A	Soft -30A	Soft -60A	Soft -90A	Soft-140A
Vessel Diameter (inch)	12	13	16	21	24
Vessel Height (inch)	48	54	65	62	72
PPM 1200 Resin (Qty in Ltrs)	50	75	125	225	325
Silex Media (Kgs)	NA	NA	25	25	25
Maximun Flow (X1000 Ltrs/Hr)	2	3	6	9	14
Activation Media	Industrial Salt	Industrial Salt	Industrial Salt	Industrial Salt	Industrial Salt
Brine Tank capacity (Liters)	120	120	Customer Scope	Customer Scope	Customer Scope
Salt Quantity (Kg) each Regenration	8	12	20	36	52
Multiport Valve Type	Automatic	Automatic	Automatic	Automatic	Automatic
Multiport valve Size & Mounting	20 NB Top Mount	25 NB Top Mount	40NB Top Mount	40NB Side Mount	40NB Side Mount
Maximun Operating Pressure	3.5 Bar	3.5 Bar	3.5 Bar	3.5 Bar	3.5 Bar
Amount	Rs. 62500/-	Rs. 72900/-	Rs. 120500/-	Rs. 150200/-	Rs. 210900/-

## Benefits of Paramount Water Softener

- Reduce the washing time effort and cost.
- Avoid corrosion/stain forming on utensils or retain shine on utensils.
- Reduce the time and cost of cooking.
- Reduce plumbing problems with scales deposition on bathroom fittings.
- Reduce soap, shampoo and detergent consumption.

Model	Soft-20M	Soft-30M	Soft-60M	Soft-90M	Soft-140M
Vessel Diameter (inch)	12	13	16	21	24
Vessel Height (inch)	48	54	65	62	72
PPM 1200 Resin (Qty in Ltrs)	50	75	125	225	325
Silex Media (Kgs)	NA	NA	25	25	25
Maximun Flow (X1000 Ltrs/Hr)	2	3	6	9	14
Activation Media	Industrial Salt	Industrial Salt	Industrial Salt	Industrial Salt	Industrial Salt
Brine Tank capacity (Liters)	120	120	Customer Scope	Customer Scope	Customer Scope
Salt Quantity (Kg) each Regenration	8	12	20	36	52
Multiport Valve Type	Manual	Manual	Manual	Manual	Manual
Multiport valve Size & Mounting	20 NB Top Mount	25 NB Top Mount	40NB Top Mount	40NB Side Mount	40NB Side Mount
Maximun Operating Pressure	3.5 Bar	3.5 Bar	3.5 Bar	3.5 Bar	3.5 Bar
Amount	Rs. 41900/-	Rs. 52500/-	Rs. 81500/-	Rs. 130700/-	Rs. 170900/-

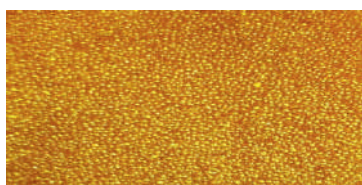

### Resin

PPL 800 is premium quality cation resin. It works up to 800PPM/hardness.



### Resin

PPL 1200 is premium quality cation resin. It works up to 1200PPM/hardness.



Low Recurring Cost



Low Recharge Frequency



Softens Excessive Hardness

# Sand Filter

Range available in FRP up to 60,000 Liters

Model	SF 20A	SF 40A	SF 60A	SF 90A
Vessel Diameter (inch)	12	13	16	21
Vessel Height (inch)	48	54	65	62
Silex Media (in KG)	25	25	50	75
Coarse sand media (in KG)	25	25	50	75
Fine sand media (in KG)	25	50	50	75
Activation Media	Only Backwash	Only Backwash	Only Backwash	Only Backwash
Maximum Flow (X1000 Ltrs/Hr)	2	3	6	9
Multiport Valve Type	Automatic	Automatic	Automatic	Automatic
Multiport valve Size & Mounting	20 NB Top Mount	25 NB Top Mount	40NB Top Mount	40NB Side Mount
Maximum Operating Pressure	3.5 Bar	3.5 Bar	3.5 Bar	3.5 Bar



## Benefits of Paramount Sand Filter

- Suspended Solids Free Water.
- Continuous Service Flow.
- Long Life ( High Capacity).
- Convenient Up gradation.





### Sand Media

The apt size of PPLSAND media which consist of fine , coarse and pebbles , will ensure filtration of even the smallest particles which normally will escape through the conventional sand filters, resulting in cleanest water..

Model	SF 20M	SF 30M	SF 60M	SF 90M	SF 140M
Vessel Diameter (inch)	12	13	16	21	24
Vessel Height (inch)	48	54	65	62	72
Silex Media (in KG)	25	25	50	75	75
Coarse sand media (in KG)	25	25	50	75	100
Fine sand media (in KG)	25	50	50	75	125
Activation Media	Only Backwash	Only Backwash	Only Backwash	Only Backwash	Only Backwash
Maximum Flow (X1000 Ltrs/Hr)	2	3	6	9	14
Multiport Valve Type	Manual	Manual	Manual	Manual	Manual
Multiport valve Size & Mounting	20 NB Top Mount	25 NB Top Mount	40NB Side Mount	40NB Side Mount	40NB Side Mount
Maximum Operating Pressure	3.5 Bar	3.5 Bar	3.5 Bar	3.5 Bar	3.5 Bar

## Effect of Sand



Chocking of Pipes Disturbance in water flow Muddy water





# Iron Filter

Range available in FRP up to 60,000 liters

Model	Fero - 30A	Fero - 60A	Fero - 90A	Fero - 140A
Vessel Diameter (inch)	13	16	21	24
Vessel Height (inch)	54	65	62	72
Silex Media (in KG)	25	25	25	25
Fero Media (in Ltr.)	25	50	100	150
Activation Media	Only Backwash	Only Backwash	Only Backwash	Only Backwash
Maximum Flow (X1000 Ltrs/Hr)	3	6	9	14
Multiport Valve Type	Automatic	Automatic	Automatic	Automatic
Multiport valve Size & Mounting	25 NB Top Mount	40NB Side Mount	40NB Side Mount	40NB Side Mount
Maximum Operating Pressure	3.5 Bar	3.5 Bar	3.5 Bar	3.5 Bar



## Benefits of Paramount Iron Filter

- Preserve Pipeline , Shower head tap, Faucets from cloning due to deposition of iron.
- Prevent from colour change of clothes specially white clothes.

## Iron Media PPLB1200

Paramount PPLB1200 is a catalyst between the oxygen and the soluble Iron compounds enhances the oxidation reduction of  $Fe^{++}$  to  $Fe^{+++}$  and produce ferric hydroxide which precipitates and easily filtered.

Model	Fero 20 M	Fero 30 M	Fero 60 M	Fero 90 M	Fero 140 M
Vessel Diameter (inch)	12	13	16	21	24
Vessel Height (inch)	48	54	65	62	72
Silex Media (in KG)	25	25	25	25	25
Fero Media (in Ltr.)	25	50	75	125	175
Activation Media	Only Backwash	Only Backwash	Only Backwash	Only Backwash	Only Backwash
Maximum Flow (X1000 Ltrs/Hr)	2	3	6	9	14
Multiport Valve Type	Manual	Manual	Manual	Manual	Manual
Multiport valve Size & Mounting	20 NB Top Mount	25 NB Top Mount	40NB Side Mount	40NB Side Mount	40NB Side Mount
Maximum Operating Pressure	3.5 Bar	3.5 Bar	3.5 Bar	3.5 Bar	3.5 Bar



Healthy Teeth



Silky & Healthy Hair



Unclogged shower

# Carbon Filter

Range available in FRP up to 60,000 liters

Model	Carbon 20A	Carbon 30A	Carbon 60A	Carbon 90A	Carbon 140A
Vessel Diameter (inch)	12	13	16	21	24
Vessel Height (inch)	48	54	65	62	72
Silex Media (in KG)	25	25	25	25	25
Carbon media (in KG)	25	50	75	100	150
Activation Media	Only Backwash	Only Backwash	Only Backwash	Only Backwash	Only Backwash
Maximum Flow (X1000 Ltrs/Hr)	2	3	6	9	14
Multiport Valve Type	Manual	Manual	Manual	Manual	Manual
Multiport valve Size & Mounting	20 NB Top Mount	25 NB Top Mount	40NB Side Mount	40NB Side Mount	40NB Side Mount
Maximum Operating Pressure	3.5 Bar	3.5 Bar	3.5 Bar	3.5 Bar	3.5 Bar

## Benefits of Paramount Carbon Filter Use

- Removing Bad Odor and Taste.
- Removing colors.
- Removing contaminants and organic chemicals , asbestos, cysts, lead, certain pesticides .

### Inside Media-

Activated Carbon physical adsorption is the primary means by which paramount activated carbon works to remove contaminants from water carbons highly pores nature provide a large surface for contaminants to collect.

In simple term physical adsorption occurs because all molecules exert attractive forces, especially molecule at the surface of a solid.



Model	Carbon 20M	Carbon 30M	Carbon 60M	Carbon 90M	Carbon 140M
Vessel Diameter (inch)	12	13	16	21	24
Vessel Height (inch)	48	54	65	62	72
Silex Media (in KG)	25	25	25	25	25
Carbon media (in KG)	25	50	75	125	175
Activation Media	Only Backwash	Only Backwash	Only Backwash	Only Backwash	Only Backwash
Maximum Flow (X1000 Ltrs/Hr)	2	3	6	9	14
Multiport Valve Type	Manual	Manual	Manual	Manual	Manual
Multiport valve Size & Mounting	20 NB Top Mount	25 NB Top Mount	40NB Side Mount	40NB Side Mount	40NB Side Mount
Maximum Operating Pressure	3.5 Bar	3.5 Bar	3.5 Bar	3.5 Bar	3.5 Bar

## Effect of Carbon



Bad Smell



Microorganisms

#### OUR OTHER PRODUCT CATEGORIES



Domestic ROs



Domestic ROs



Water Dispenser



Water Cooler



Industrial ROs

#### PARAMOUNT POLYMERS PVT. LTD.

Plot No. 60, Sector-25, Ballabhgarh, Faridabad, Haryana-121004 (India)

Tel. : 0129-4870692 Email : [info@paramountpure.com](mailto:info@paramountpure.com), [support@paramountpure.com](mailto:support@paramountpure.com)

Web : [www.paramountpure.com](http://www.paramountpure.com) CUSTOMER CARE : 18001024880 (Toll Free)



**SGS**



9001:2015



14001:2015



18001:2007



Yellow









